


# 歐規 DIN6350 6DAKT 6-JAW POWERFUL ADJUSTMENT STEEL BODY CHUCKS

## 可調式強力型六爪鋼殼夾頭

### 尺寸圖 » Dimensions

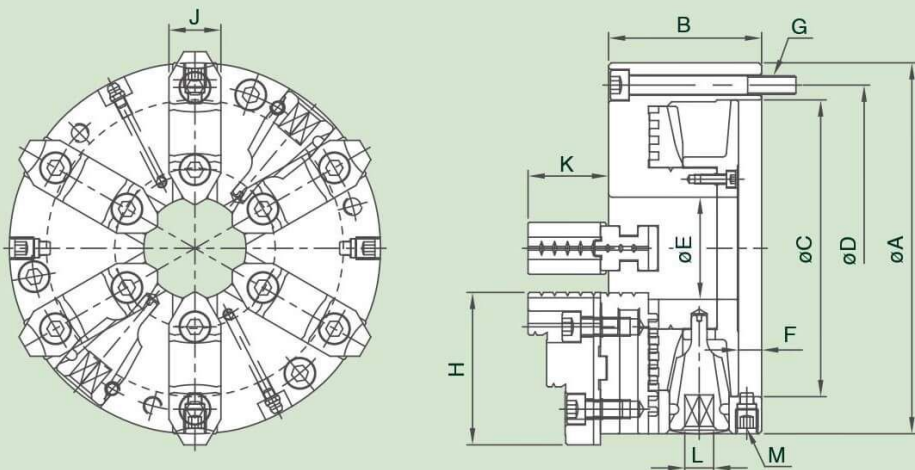

### 規格表 » Specifications

單位/UNIT:mm

| 型式/規格<br>MODEL<br>/SPEC. | A   | B    | C   | D   | E   | G           | F  | H     | J  | K    | L  | M           | 最高迴轉速<br>Max.Speed<br>r.p.m.(min <sup>-1</sup> ) | 把握範圍 Max. Gripping Diameter |                      |
|--------------------------|-----|------|-----|-----|-----|-------------|----|-------|----|------|----|-------------|--|-----------------------------|----------------------|
|                          |     |      |     |     |     |             |    |       |    |      |    |             |  | 外徑把握<br>O.D.Clamping        | 內徑把握<br>I.D.Clamping |
| 6DAKT-08                 | 200 | 82.5 | 160 | 176 | 55  | 3-M10×1.5P  | 12 | 82    | 28 | 43   | 11 | 4-M12×1.75P | 2900   | ø17-ø193                    | ø67-ø178             |
| 6DAKT-10                 | 250 | 91   | 200 | 224 | 76  | 3-M12×1.75P | 13 | 102   | 35 | 54.5 | 12 | 4-M12×1.75P | 2200   | ø19-ø248                    | ø84-ø232             |
| 6DAKT-12                 | 315 | 103  | 260 | 286 | 103 | 3-M16×2P    | 14 | 117.5 | 40 | 56.5 | 14 | 4-M12×1.75P | 1800   | ø23-ø323                    | ø93-ø296             |
| 6DAKT-15                 | 400 | 122  | 330 | 362 | 136 | 3-M16×2P    | 15 | 150   | 50 | 74.5 | 17 | 4-M12×1.75P | 1300   | ø30-ø419                    | ø124-ø396            |